


# XBee® Sensors

Compact Battery Powered Sensors with Integrated ZigBee®

XBee sensors easily integrate into ZigBee networks, featuring long battery life and small size for unobtrusive installation anywhere.

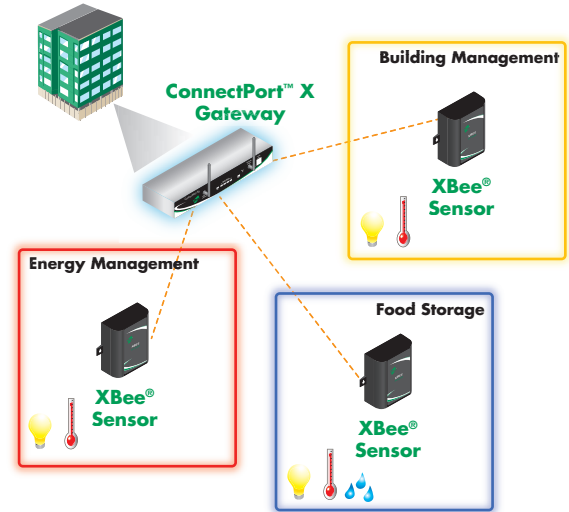

## Features/Benefits

- ZigBee wireless sensors
  - Temperature, humidity, light
- Small form factor can be mounted anywhere
- Long-life battery
- Easy to install/configure
- Easy to integrate with Digi's Drop-in Networking family of gateways, adapters and modules on a ZigBee network
  - Integrate with custom Python® development environment for events, triggers and data logging
- Applications include building automation and security, energy management, food management, freight/vehicle monitoring

## Overview

ZigBee technology enables low-cost, low-power networking of sensors, controllers and other devices in self-configuring, self-healing wireless mesh networks. Part of Digi's Drop-in Networking solutions, XBee sensors offer the ability to provide real-time data from a variety of sensors (e.g., temperature, humidity, light) in a single solution for wireless communication across a ZigBee infrastructure.

Their small form factor and long-life battery power make XBee sensors easy to integrate with Digi's Drop-in Networking solutions to provide reliable, unobtrusive communications. Applications include building automation and security, energy management, food management, freight/vehicle monitoring and many more.

Installation is a snap. Simply insert batteries, add the XBee sensor to the ZigBee network, and configure the update interval. Next, mount the device in an out-of-the way location and start communicating.

XBee sensors can be used with ConnectPort™ X gateways, XBee embedded modules, XBee adapters or XBee wall routers to drop-in end-to-end device networks – without the need for a wired network infrastructure.



# Features/Specifications

## FEATURES

### General

- Frequency: 2.4 GHz (ISM)
- Internal antenna

### Performance

- Indoor/Urban range: 133 ft (40 m)
- Outdoor RF line-of-sight range: 400 ft (120 m)
- Transmit power output: 1.25 mW (+1 dBm) / 2 mW (+3 dBm) boost mode
- RF data rate: 250,000 bps
- Receive sensitivity (1% PER): -97 dBm (-98 dBm boost mode)

### Networking and Security

- Networking topologies: Point-to-Point, Point-to-Multipoint, Peer-to-Peer, Mesh
- Number of channels: 16 - 5 MHz channels (Direct Sequence Spread Spectrum)
- Filtration options: PAN ID, Channel, 2^64 (64-bit) addresses

### LEDs

- Power: Solid when powered and not associated to network.
- Associate: Blinks when unit is associated to network

### Push Button

- Device reset
- Configuration reset to factory defaults
- Identification/Commissioning mode

## INTEGRATED SENSORS

### Temperature Sensor

- Range: -18° C to 55° C (-0.4° F to 131° F)
- Accuracy: +/- 2° C

### Ambient Light Sensor

- Range of spectral bandwidth: 360 to 970 nm (similar to human eye)
- Wavelength of peak sensitivity: 570 nm

### Humidity Sensor

- Range: 0 to 100% RH
- Interchangeability: +/- 5 %RH (0% RH to 59%RH) +/- 8 %RH (60% RH to 100%RH)
- Accuracy: +/- 3.5% RH

## REGULATORY APPROVALS (pending)

- FCC Part 15, Class B
- EN55022 Class B, EN 55024
- RoHS Compliant

## DIMENSIONS

- Length: 2.70 in (6.85 cm)
- Width: 2.50 in (6.35 cm)
- Height: 1.30 in (3.30 cm)
- Weight: 0.35 lb (0.158 kg) w/batteries, 0.20 lb (0.091 kg) without batteries

## ENVIRONMENTAL


- Operating temperature: -18° C to 55° C (-0.4° F to 131° F)
- Power requirements: 3 x AA alkaline 1.5V batteries (batteries not included)

## INTERFACES


- ZigBee - compatible with:
  - Digi XBee ZNet 2.5 (formerly Series 2) module
  - EmberZNet 2.5x mesh stack



**XBee Sensor - Front**

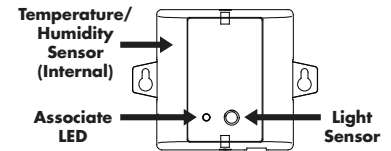

**XBee Sensor - Top/Bottom**



## MODEL.....PART NUMBERS

### Model

- XBee Sensor - Battery powered temperature and light
- XBee Sensor - Battery powered temperature, humidity and light

### Worldwide

- XS-B14-CB1RB
- XS-B14-CB2RB

**DIGI SERVICE AND SUPPORT** - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. [www.digi.com/support](http://www.digi.com/support)



Delmation Products BV  
[www.delmation.nl](http://www.delmation.nl)  
 Tel: (+31) (0)79 342 2041

**Digi International**, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

[www.digi.com](http://www.digi.com)

